


## INTERFACE CABLE BETWEEN THE FR-3000 AND THE FLEX IIIA

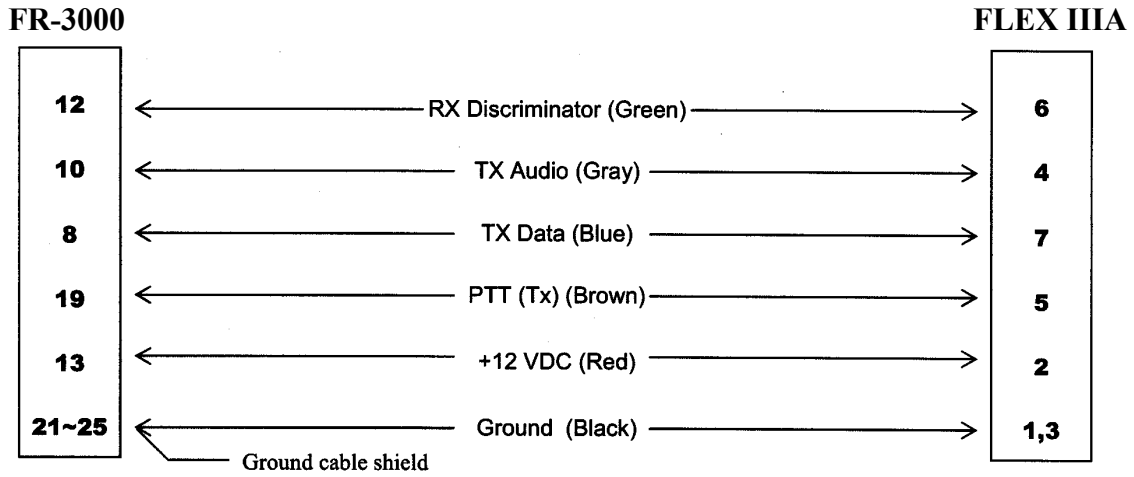

The ICOM FR-3000 requires a male DB-25 Connector. The FLEX IIIA uses a removable screw type of terminal block and requires the bare wire from the DB-25 cable.