


INTERFACE CABLE BETWEEN THE FR-3000 AND THE FLEX IV DSP

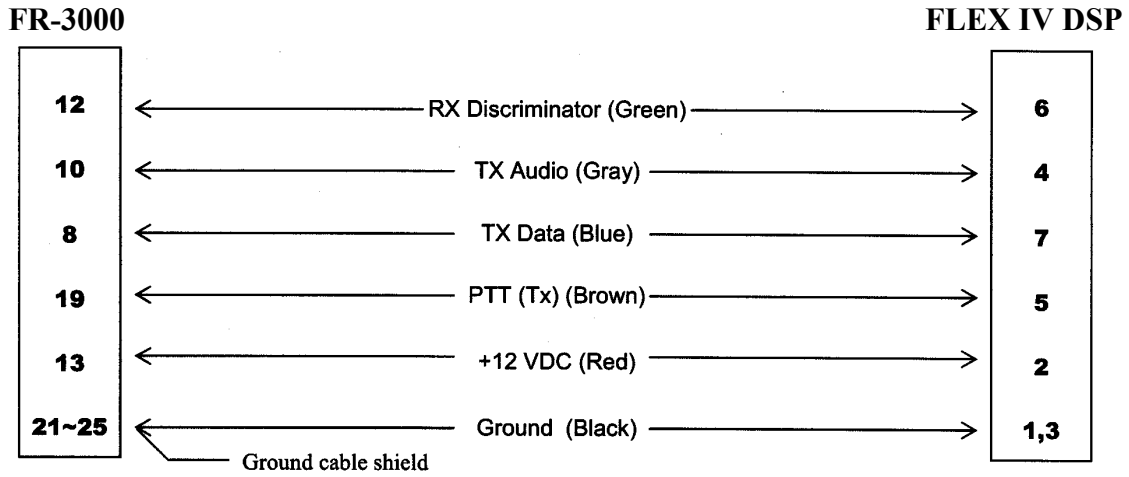

The ICOM FR-3000 requires a male DB-25 Connector. The FLEX IV DSP uses a removable screw type of terminal block and requires the bare wire from the DB-25 cable.