


## INTERFACE CABLE BETWEEN THE FR-4000 AND THE CS9800

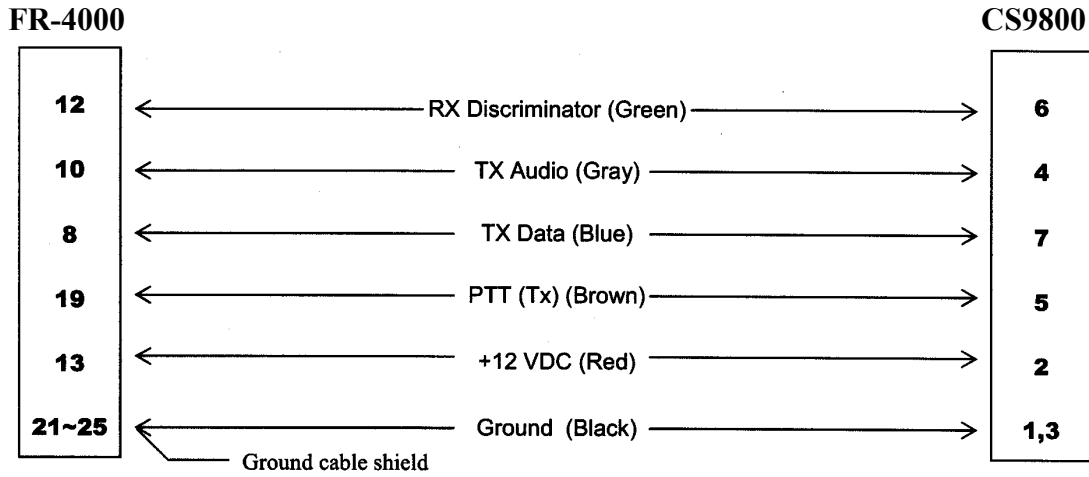

The ICOM FR-4000 requires a male DB-25 Connector. The CS9800 uses a fixed screw type of terminal block and requires the bare wire from the DB-25 cable.

The TX Data line (marked tone on the CS9800) is not typically used unless you have a TSU32P or are trying the page using CTCSS tones.