


INTERFACE CABLE BETWEEN THE FR-4000 AND THE FLEX IV DSP

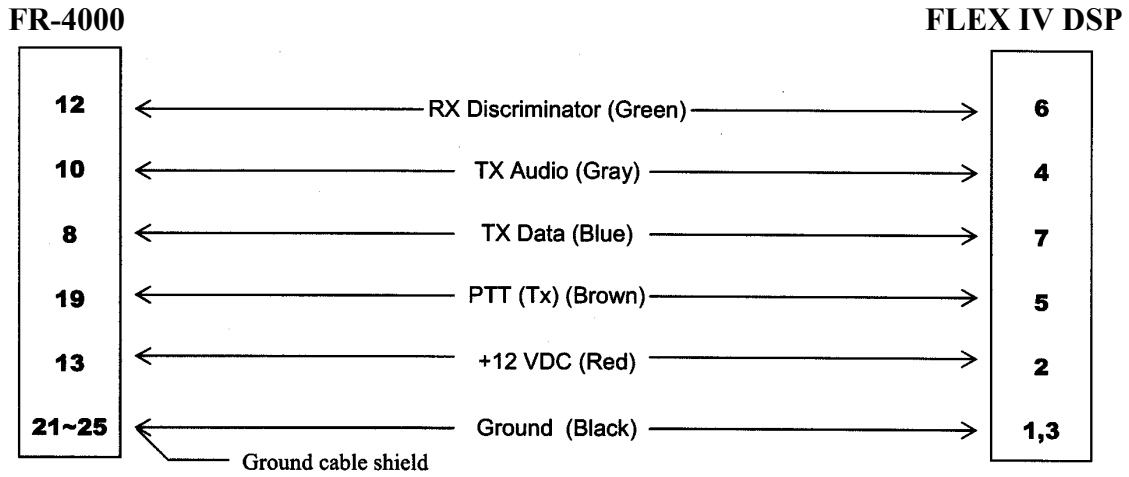

The ICOM FR-4000 requires a male DB-25 Connector. The FLEX IV DSP uses a removable screw type of terminal block and requires the bare wire from the DB-25 cable.