


INTERFACE CABLE BETWEEN THE FR-4000 AND THE LT-4200

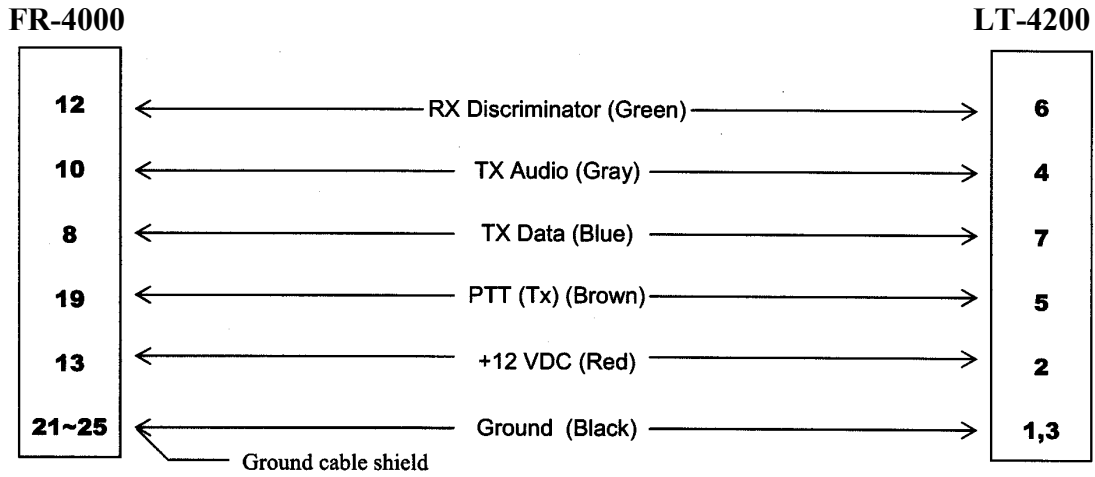

The ICOM FR-4000 requires a male DB-25 Connector. The LT4200 uses a removable screw type of terminal block and requires the bare wire from the DB-25 cable.