


## INTERFACE CABLE BETWEEN THE TKR-751 AND CS9800

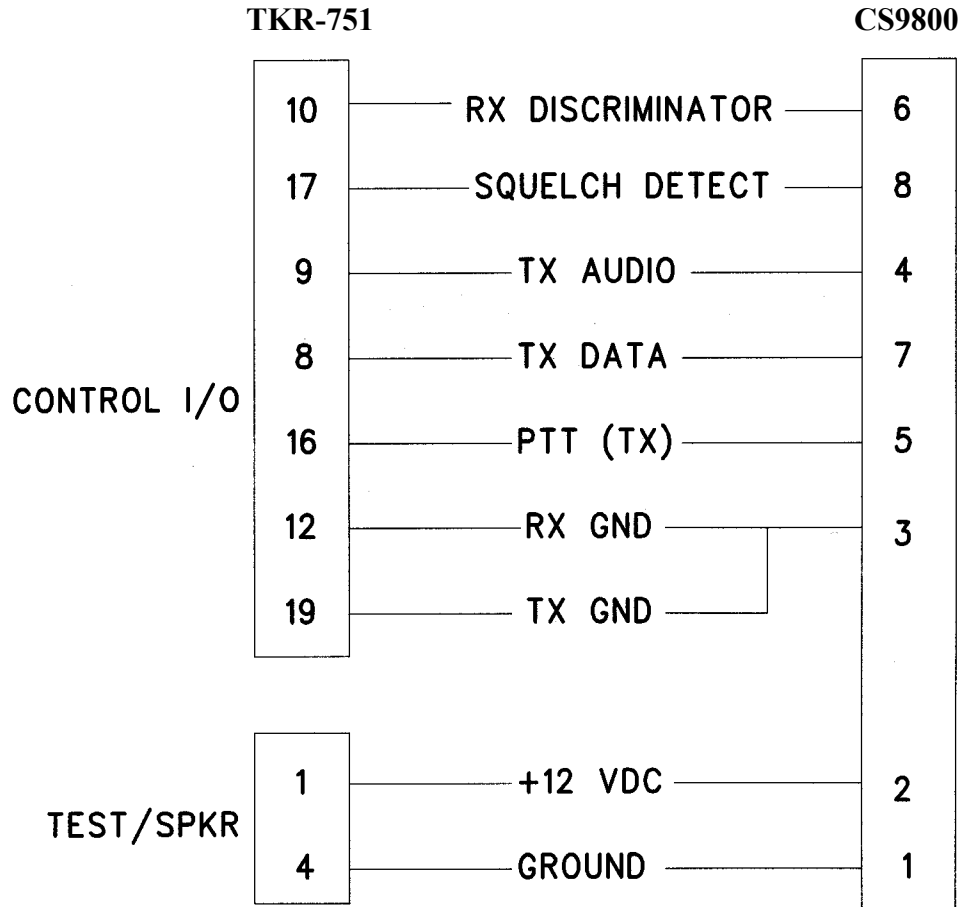

The Kenwood TKR-751 requires a male DB-25 Connector for the CONTROL I/O Jack and a special connector for the TEST/SPKR Jack. The CS9800 uses a fixed screw type of terminal block and requires the bare wire from the DB-25 cable and the TEST SPKR Cable.

Normally Pin 9 and 12 of the TEST/SPKR cable is connected together. This allows the use of the internal speaker.

The TX DATA Connection is only needed if you have the TSU32P or are using CTCSS for paging.