


Remote Mounting Bracket that comes with the CS800D radio

When you take the radio out of the box you get the following:

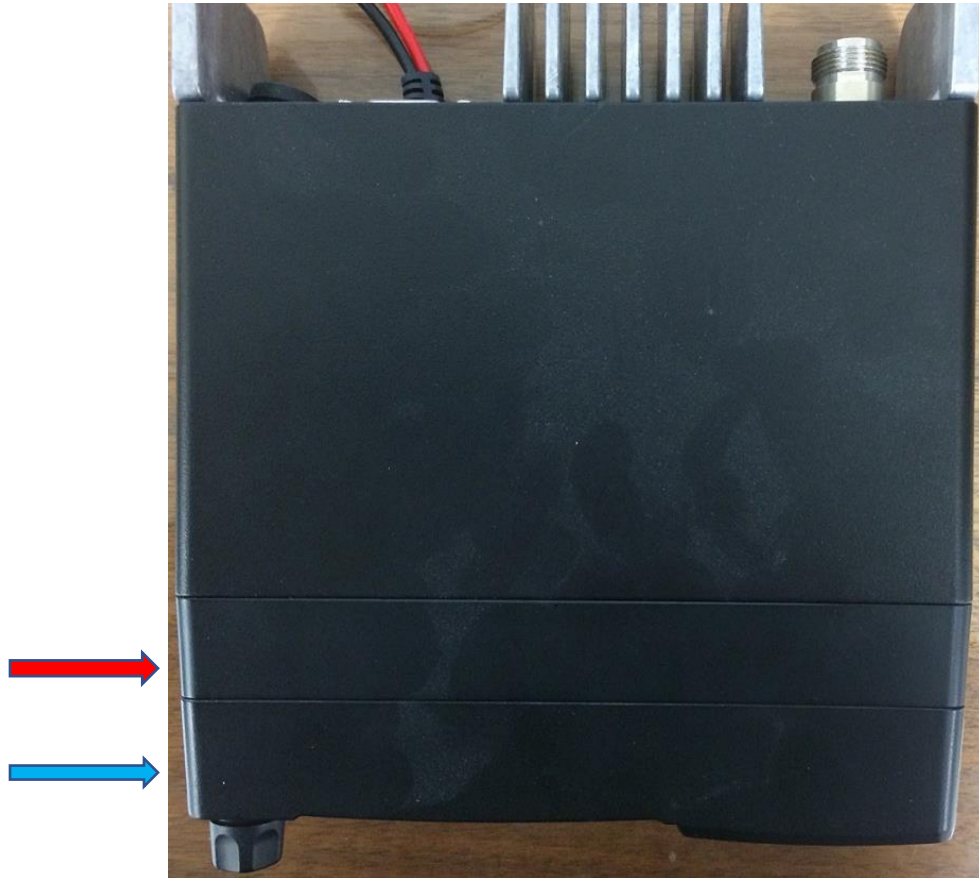

The red arrow above is pointing to the Remote Mounting Bracket and the blue arrow above is pointing to the head.

To get the Remote Mounting Bracket off the radio, you need to do the following steps.

1. Take the head off the remote mounting brackets by pressing the latch down and moving the head to the left. When I do it I depress the latch and simultaneously hit the head from the right. The bracket slides off towards the latch.

A picture of the latch is shown below:




LATCH

The Remote Mounting Bracket does not normally slide off the radio easily. Sometimes you have to hit it a few times before it slides off.

A Picture of the radio with the head off the body.



2. Remove the CAT 5 cable. A picture of the cable is shown below:

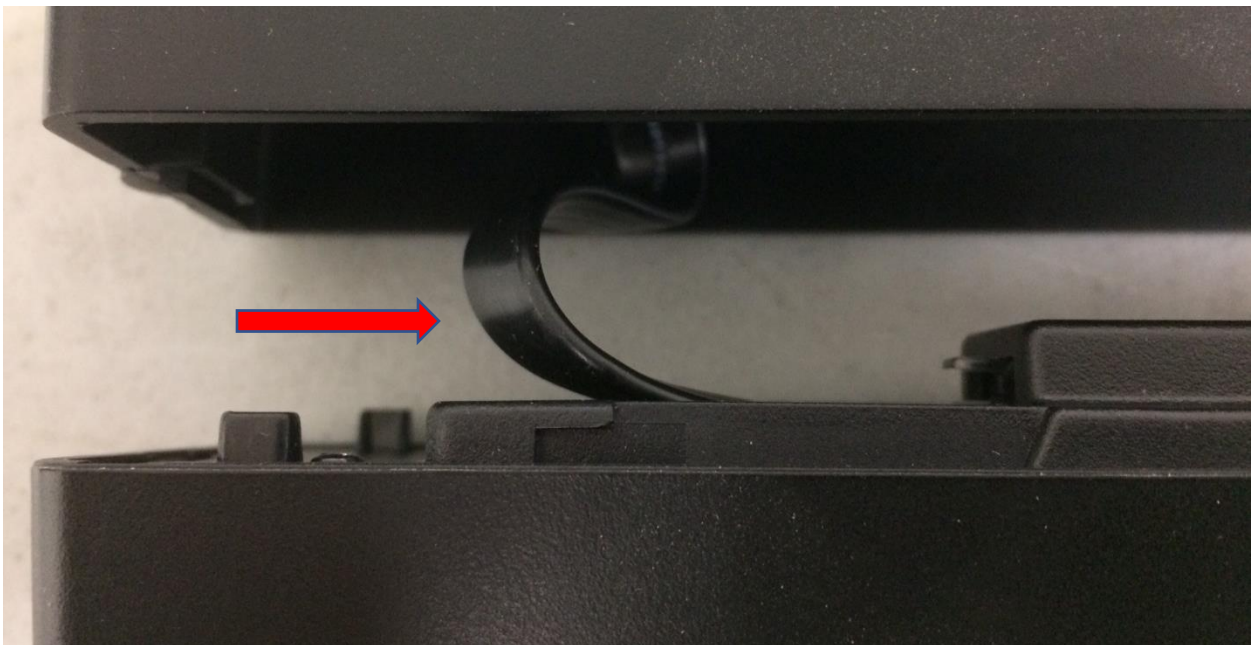

3. You now have the head separated from the radio body. A picture of the radio body is shown below with the Remote Mounting Bracket still attached. Remove the four Philip Head screws that hold the bracket to the radio body



The other two Philip Head screws are used to mount the RF Power Amp Module to the chassis. Do not remove those.

4. After you take off the screws you can now pull the Remote Mounting Bracket off the radio body chassis as shown in the picture on the next page.



Remote Mounting Bracket

You now have a Remote Mounting Bracket you can use to remotely mount the head. If you would like a spare or rather not take the Remote Mounting Bracket off the radio, we sell additional brackets for \$15.